

ZDY 型

锥形转子制动电动机 ZDY conical rotor brake motor




产品特性

ZDY 型锥形转子三相异步电动机是 ZD 系列派生电机，带有自动刹车装置，适用于电动葫芦的小车运行及起重机的大车运行机构或要求起动转矩较小及制动较平缓的机械装置的驱动。已通过 ISO9001 国际质量体系认证。

Product characteristics

ZDY series of conical rotor three-phase asynchronous motor is a derivative product of ZD series motors, which has automatic braking device. It is applied to the operation of the trolley of the electric hoist and the cart running mechanism of the crane, or the driving of the mechanical device requiring less starting torque and gentle braking. In addition, it has passed ISO9001 international quality system certification.

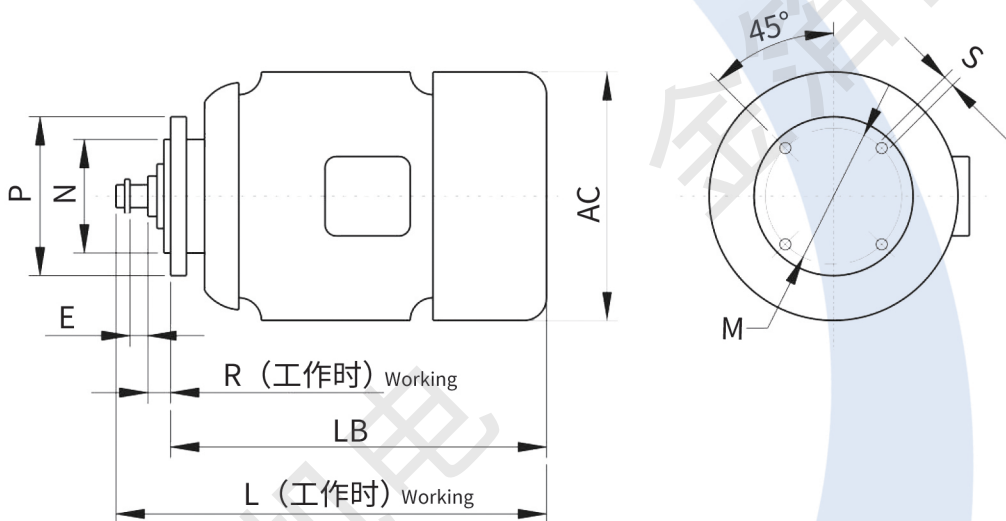

ZDY₁ 系列电动机外形及安装尺寸图、表 (mm)

ZDY₁ series of motor outline and installation dimension chart/ table

型号及功率 (kW) Type and power (kW)	安装尺寸及公差 (mm) Installation dimensions and tolerances								外形尺寸 (mm) Outline dimension			
	轴伸 Shaft extension	矩形花键 Square spline	E	R (工作时) Working	N	P	S	M	凸缘孔数 Number of flange holes	AC	LB	L (工作时) Working
ZDY ₁ 11-4/0.2	4D-15f9×12×4d11 或 D=15 Z=36		22	15	75	110	7	90		155	230	270
ZDY ₁ 12-4/0.4											250	290
ZDY ₁ 21-4/0.8B	6D-20f9×16×4d11 或 D=18 Z=36		24	20	100	140	9	120		218	289	337
ZDY ₁ 22-4/1.5B											317	365
ZDY ₁ 23-4/2.2B	6D-20f9×16×4d11										341	389
ZDY ₁ 21-4/0.8D	6D-25f9×22×6d11		30	11.5	180	220	11	200	4	218	289	335.5
ZDY ₁ 22-4/1.5D											317	363.5
ZDY ₁ 23-4/2.2D											341	387.5
ZDY ₁ 21-4/0.8TD											289	335.5
ZDY ₁ 31-4/3.0	6D-28d9×23×6c11		35	14	180	250	15	215		272	367	415
ZDY ₁ 32-4/4.5					230	300		265			389	437
ZDY ₁ 31-4/3.0TD					250	330	13	286			367	419
ZDY ₁ 23-4/2.2TD	6D-25d9×22×6d11		35	11.5	250	330	15	286	4	209	317	368.5
ZDY ₁ 41-4/7.5	10D-35d9×28×4c11		47	16	250	325	15	290	4	330	436	483