YE4 系列

三相异步电动机

YE4 series three-phase induction motor

产品特点

YE4系列三相异步电机的效率达到GB18613-2020《中小型电动机能效限定值及能效等级》中的2级能效标准，同时满足IEC60034-30-1中的IE4级能效。效率与YE3系列相应规格比较，效率平均提高2%～3%；与普通YX3系列相应规格比较，效率平均提高6%左右，且在50-100%负荷范围内有比较平坦的效率特性。安装尺寸和功率等级完全符合IEC标准和DIN42673标准，冷却方式为IC411，防护等级为IP55，适用于一般场所和无特殊要求的机械，如风机、压缩机、水泵、运输机械、农业机械等。采用规范化设计、优质原材料、先进的加工设备，此系列电机节能效果显著、振动小、噪声低、性能稳定、安全可靠。

Product Characteristics

The efficiency of YE3 series three-phase asynchronous motors reaches the level 3th energy efficiency standard of GB18613-2020《Minimum allowable values of energy efficiency and values of efficiency grades for motors》, meanwhile meets the level IE3 energy efficiency standard of IEC60034-30-1. Compared with the corresponding specifications of the YE3 series, the efficiency of the motor is increased by 2%～3% on average;Compared with the corresponding specifications of ordinary YX3 series, the efficiency of the motor is increased by about 6% on average and has relatively flat efficiency characteristics in the range of 50-100% load. The installation size and power level are in completely compliance with IEC standard and DIN42673 standard. The cooling mode is IC411, and protection class is IP55. It is suitable for general places and machinery without special requirements, such as fans, compressors, pumps, transportation machinery, agricultural machinery, etc. Adopting standardized design, high-quality raw materials and advanced processing equipment, this series of motors have remarkable energy-saving effect, low vibration, low noise, stable performance, safe and reliable.

产品技术数据（380V，50Hz）Product technical data(380V,50Hz)

型号 Type	功率 kW	转速 r/min	效率 Eff.%	功率因数 P.F	额定电流 A	堵转电流倍数 I_{st}/I_N	额定转矩 N*m	堵转转矩倍数 T_{st}/T_N	最大转矩倍数 T_{max}/T_N	噪声 dB(A)	重量 kg
同步转速 3000r/min											
YE4-80M1-2	0.75	2890	83.5	0.83	1.64	8.5	2.48	2.2	2.3	62	19
YE4-80M2-2	1.1	2890	85.2	0.83	2.36	8.5	3.63	2.2	2.3	62	19
YE4-90S-2	1.5	2900	86.5	0.85	3.10	9.0	4.94	2.2	2.3	67	20
YE4-90L-2	2.2	2900	88.0	0.86	4.42	9.0	7.24	2.2	2.3	67	20
YE4-100L-2	3	2900	89.1	0.87	5.88	9.5	9.88	2.2	2.3	74	28
YE4-112M-2	4	2910	90.0	0.88	7.67	9.5	13.13	2.2	2.3	77	40
YE4-132S1-2	5.5	2945	90.9	0.88	10.5	9.5	17.8	2	2.3	79	55
YE4-132S2-2	7.5	2945	91.7	0.89	14.0	9.5	24.3	2	2.3	79	55
YE4-160M1-2	11	2955	92.6	0.89	20.3	9.5	35.6	2	2.3	81	115
YE4-160M2-2	15	2955	93.3	0.89	27.5	9.5	48.5	2	2.3	81	115
YE4-160L-2	18.5	2955	93.7	0.89	33.7	9.5	59.8	2	2.3	81	120
YE4-180M-2	22	2965	94.0	0.89	40.0	9.5	70.9	2	2.3	83	192
YE4-200L1-2	30	2970	94.5	0.89	54.2	9.0	96.5	2	2.3	84	252
YE4-200L2-2	37	2970	94.8	0.89	66.6	9.0	119.0	2	2.3	84	275
YE4-225M-2	45	2975	95.0	0.89	80.9	9.0	144.5	2	2.3	86	315
YE4-250M-2	55	2980	95.3	0.89	98.5	9.0	176.3	2	2.3	89	417
YE4-280S-2	75	2980	95.6	0.89	133.9	8.5	240.4	1.8	2.3	91	571
YE4-280M-2	90	2980	95.8	0.89	160.4	8.5	288.4	1.8	2.3	91	607
YE4-315S-2	110	2985	96.0	0.89	195.6	8.5	351.9	1.8	2.3	92	1170
YE4-315M-2	132	2985	96.2	0.89	234.2	8.5	422.3	1.8	2.3	92	1288
YE4-315L1-2	160	2985	96.3	0.89	283.6	8.5	511.9	1.8	2.2	92	1351
YE4-315L2-2	200	2985	96.5	0.89	353.8	8.5	639.9	1.8	2.2	92	1458
YE4-355M-2	250	2985	96.5	0.91	432.5	8.5	799.8	1.6	2.2	97	1860
YE4-355L-2	315	2985	96.5	0.91	545.0	8.5	1007.8	1.6	2.2	97	2108
YE4-3551-2	355	2985	96.5	0.90	621.0	8.6	1135.8	0.9	1.8	97	2280
同步转速 1500r/min											
YE4-80M1-4	0.55	1435	83.9	0.73	1.36	6.6	3.66	2.4	2.3	56	18
YE4-80M2-4	0.75	1435	85.7	0.74	1.80	8.5	4.99	2.3	2.3	56	18
YE4-90S-4	1.1	1445	87.2	0.75	2.56	8.5	7.27	2.3	2.3	59	18
YE4-90L-4	1.5	1445	88.2	0.76	3.40	9.0	9.91	2.3	2.3	59	20
YE4-100L1-4	2.2	1460	89.5	0.79	4.73	9.0	14.4	2.3	2.3	64	33
YE4-100L2-4	3	1460	90.4	0.80	6.30	9.5	19.6	2.3	2.3	64	40
YE4-112M-4	4	1460	91.1	0.80	8.34	9.5	26.2	2.3	2.3	65	42
YE4-132S-4	5.5	1475	91.9	0.80	11.4	9.5	35.6	2	2.3	71	64
YE4-132M-4	7.5	1475	92.6	0.81	15.2	9.5	48.6	2	2.2	71	68

产品技术数据（380V，50Hz）Product technical data(380V,50Hz)

型号 Type	功率 kW	转速 r/min	效率 Eff.%	功率因数 P.F	额定电流 A	堵转电流倍数 I_{st}/I_N	额定转矩 N*m	堵转转矩倍数 T_{st}/T_N	最大转矩倍数 T_{max}/T_N	噪声 dB(A)	重量 kg
YE4-160M-4	11	1475	93.3	0.83	21.6	9.5	71.2	2	2.2	73	110
YE4-160L-4	15	1475	93.9	0.84	28.9	9.5	97.1	2	2.2	73	120
YE4-180M-4	18.5	1480	94.2	0.86	34.7	9.5	119.4	2	2.2	76	196
YE4-180L-4	22	1480	94.5	0.86	41.1	9.5	142.0	2	2.3	76	215
YE4-200L-4	30	1485	94.9	0.86	55.9	9.0	192.9	2	2.3	76	275
YE4-225S-4	37	1485	95.2	0.86	68.7	9.0	238.0	2	2.3	78	328
YE4-225M-4	45	1485	95.4	0.86	83.3	9.0	289.4	2	2.3	78	355
YE4-250M-4	55	1485	95.7	0.86	101.5	9.0	353.7	2	2.3	79	453
YE4-280S-4	75	1490	96.0	0.88	134.9	8.5	480.7	2	2.3	80	596
YE4-280M-4	90	1490	96.1	0.88	161.7	8.5	576.9	2	2.3	80	693
YE4-315S-4	110	1490	96.3	0.89	195.0	8.5	705.0	1.8	2.2	88	1212
YE4-315M-4	132	1490	96.4	0.89	233.8	8.5	846.0	1.8	2.2	88	1350
YE4-315L1-4	160	1490	96.6	0.89	282.8	8.5	1025.5	1.8	2.2	88	1424
YE4-315L2-4	200	1490	96.7	0.90	349.2	8.5	1281.9	1.8	2.2	88	1510
YE4-355M-4	250	1490	96.7	0.90	436.4	8.5	1602.4	1.8	2.2	92	1876
YE4-355L-4	315	1490	96.7	0.90	549.9	8.5	2019.0	1.8	2.2	92	2200
YE4-3551-4	355	1490	96.7	0.88	633.8	8.5	2275.3	0.9	1.8	92	2396
同步转速 1000r/min											
YE4-90S-6	0.75	955	82.7	0.70	1.97	7.5	7.50	2.1	2.1	57	20
YE4-90L-6	1.1	955	84.5	0.70	2.83	7.5	11.0	2.1	2.1	57	21
YE4-100L-6	1.5	960	85.9	0.71	3.74	7.5	14.9	2.1	2.1	61	30
YE4-112M-6	2.2	970	87.4	0.71	5.39	7.5	21.7	2.1	2.1	65	40
YE4-132S-6	3	975	88.6	0.71	7.25	7.5	29.4	2	2.1	69	55
YE4-132M1-6	4	975	89.5	0.72	9.43	8.0	39.2	2	2.1	69	65
YE4-132M2-6	5.5	975	90.5	0.72	12.8	8.0	53.9	2	2.1	69	73
YE4-160M-6	7.5	980	91.3	0.76	16.4	8.0	73.1	2	2.1	73	110
YE4-160L-6	11	980	92.3	0.77	23.5	8.5	107.2	2	2.1	73	126
YE4-180L-6	15	985	92.9	0.80	30.7	8.5	145.4	2	2.1	73	181
YE4-200L1-6	18.5	985	93.4	0.81	37.2	8.5	179.4	2	2.1	73	230
YE4-200L2-6	22	985	93.7	0.81	44.0	8.5	213.3	2	2.1	73	239
YE4-225M-6	30	985	94.2	0.83	58.3	8.3	290.9	2	2.1	74	301
YE4-250M-6	37	990	94.5	0.84	70.8	8.3	356.9	2	2.1	76	387
YE4-280S-6	45	990	94.8	0.85	84.9	8.5	434.1	2	2	78	501
YE4-280M-6	55	990	95.1	0.86	102.2	8.5	530.6	2	2	78	547
YE4-315S-6	75	990	95.4	0.84	142.2	8.0	723.5	1.6	2	83	1178

产品技术数据（380V，50Hz）Product technical data(380V,50Hz)

型号 Type	功率 kW	转速 r/min	效率 Eff.%	功率因数 P.F	额定电流 A	堵转电流倍数 I_{st}/I_N	额定转矩 N*m	堵转转矩倍数 T_{st}/T_N	最大转矩倍数 T_{max}/T_N	噪声 dB(A)	重量 kg
YE4-315M-6	90	990	95.6	0.85	168.3	8.0	868.2	1.6	2	83	1230
YE4-315L1-6	110	990	95.8	0.85	205.2	8.0	1061.1	1.6	2	83	1208
YE4-315L2-6	132	990	96.0	0.86	242.9	8.0	1273.3	1.6	2	83	1340
YE4-355M1-6	160	990	96.2	0.86	293.8	8.0	1543.4	1.6	2	85	1680
YE4-355M2-6	200	990	96.3	0.87	362.7	8.0	1929.3	1.6	2	85	1780
YE4-355L-6	250	990	96.5	0.87	452.4	8.0	2411.6	1.6	2	85	2205
YE4-3552-6	315	990	96.6	0.82	604.2	7.9	3038.6	0.9	1.8	91	2380
YE4-3553-6	355	990	96.6	0.82	680.9	7.9	3424.5	0.9	1.8	91	2490
同步转速 750r/min											
YE4-100L1-8	0.75	725	78.4	0.66	2.20	7.0	9.88	2	2	59	32
YE4-100L2-8	1.1	725	80.8	0.67	3.09	7.0	14.5	2	2	59	35
YE4-112M-8	1.5	725	82.6	0.69	4.00	7.0	19.8	2	2	61	37
YE4-132S-8	2.2	725	84.5	0.70	5.65	7.5	29.0	1.8	2	64	54
YE4-132M-8	3	725	85.9	0.70	7.58	7.8	39.5	1.8	2	64	54
YE4-160M1-8	4	725	87.1	0.71	9.83	7.9	52.7	1.8	2	68	104
YE4-160M2-8	5.5	725	88.3	0.72	13.1	8.1	72.5	1.8	2	68	104
YE4-160L-8	7.5	725	89.3	0.74	17.2	7.8	98.8	1.8	2	68	126
YE4-180L-8	11	725	90.4	0.74	25.0	7.9	144.9	1.8	2	70	219
YE4-200L-8	15	725	91.2	0.75	33.3	8.0	197.6	1.8	2	73	225
YE4-225S-8	18.5	725	91.7	0.75	40.9	8.1	243.7	1.8	2	73	280
YE4-225M-8	22	725	92.1	0.76	47.8	8.3	289.8	1.8	2	73	280
YE4-250M-8	30	725	92.7	0.77	63.9	7.9	395.2	1.8	2	75	378
YE4-280S-8	37	725	93.1	0.78	77.4	7.9	487.4	1.8	2	76	475
YE4-280M-8	45	725	93.4	0.78	93.9	7.9	592.8	1.8	2	76	541
YE4-315S-8	55	725	93.7	0.80	111.5	8.2	724.5	1.6	2	82	995
YE4-315M-8	75	725	94.2	0.80	151.2	7.6	987.9	1.6	2	82	1046
YE4-315L1-8	90	725	94.4	0.81	178.8	7.7	1185.5	1.6	2	82	1052
YE4-315L2-8	110	725	94.7	0.81	217.9	7.7	1449.0	1.6	2	82	1130
YE4-355M1-8	132	725	94.9	0.81	260.9	7.7	1738.8	1.6	2	89	1714
YE4-355M2-8	160	725	95.1	0.82	311.7	7.7	2107.6	1.6	2	89	1870
YE4-355L-8	200	725	95.4	0.82	388.4	7.8	2634.5	1.6	2	89	1980
YE4-3552-8	250	725	95.4	0.80	497.7	7.6	3293.1	1.1	1.8	89	2386
YE4-3553-8	315	725	95.4	0.80	627.1	7.6	4149.3	0.9	1.8	89	2496

IM B3 外形及安装尺寸 IM B3 Overall and Mounting dimensions

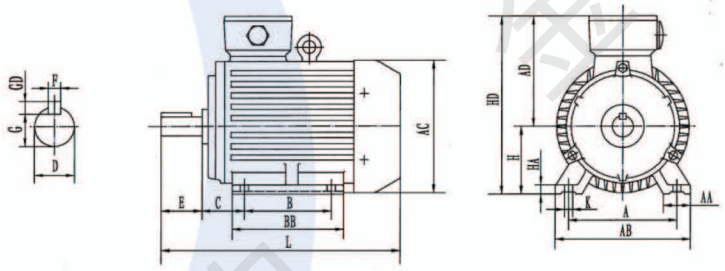

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension							
		A	B	C	D	E	F	G	H	K	AA	BB	HA	AB	AC	AD	HD	L
80M	2、4	125	100	50	19	40	6	15.5	80	10	34	130	10	165	175	145	220	305
90S	2、4、6	140	100	56	24	50	8	20	90	10	36	140	12	180	205	170	265	360
90L	2、4、6	140	125	56	24	50	8	20	90	10	36	165	12	180	205	170	265	390
100L	2、4、6、8	160	140	63	28	60	8	24	100	12	40	176	14	205	215	180	270	435
112M	2、4、6、8	190	140	70	28	60	8	24	112	12	45	180	15	230	255	200	310	470
132S	2、4、6、8	216	140	89	38	80	10	33	132	12	55	186	18	270	310	230	365	510
132M	4、6、8	216	178	89	38	80	10	33	132	12	55	224	18	270	310	230	365	550
160M	2、4、6、8	254	210	108	42	110	12	37	160	14.5	65	258	19	320	340	260	425	730
160L	2、4、6、8	254	254	108	42	110	12	37	160	14.5	65	302	19	320	340	260	425	760
180M	2、4	279	241	121	48	110	14	42.5	180	14.5	70	311	22	355	390	285	460	770
180L	4、6、8	279	279	121	48	110	14	42.5	180	14.5	70	349	22	355	390	285	460	800
200L	2、4、6、8	318	305	133	55	110	16	49	200	18.5	70	363	25	395	445	320	520	860
225S	4、8	356	286	149	60	140	18	53	225	18.5	75	349	28	435	495	350	575	830
225M	2	356	311	149	55	110	16	49	225	18.5	75	375	28	435	495	350	575	830
225M	4、6、8	356	311	149	60	140	18	53	225	18.5	75	375	28	435	495	350	575	860

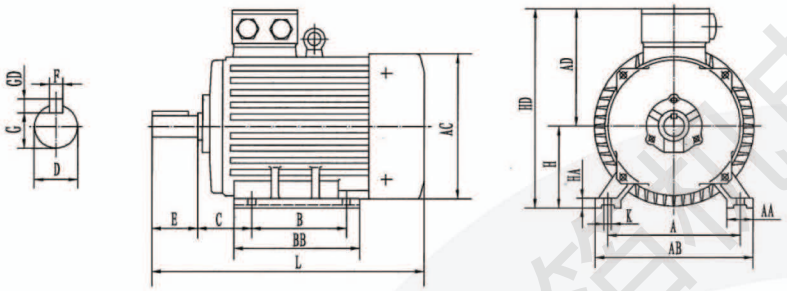

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension							
		A	B	C	D	E	F	G	H	K	AA	BB	HA	AB	AC	AD	HD	L
250M	2	406	349	168	60	140	18	53	250	24	80	440	30	490	550	390	635	990
250M	4、6、8	406	349	168	65	140	18	58	250	24	80	440	30	490	550	390	635	990
280S	2	457	368	190	65	140	18	58	280	24	85	480	35	550	630	435	705	990
280S	4、6、8	457	368	190	75	140	20	67.5	280	24	85	480	35	550	630	435	705	990
280M	2	457	419	190	65	140	18	58	280	24	85	536	35	550	630	435	705	1040
280M	4、6、8	457	419	190	75	140	20	67.5	280	24	85	536	35	550	630	435	705	1040
315S	2	508	406	216	65	140	18	58	315	28	120	570	45	635	645	530	845	1180
315S	4、6、8	508	406	216	80	170	22	71	315	28	120	570	45	635	645	530	845	1290
315M	2	508	457	216	65	140	18	58	315	28	120	680	45	635	645	530	845	1210
315M	4、6、8	508	457	216	80	170	22	71	315	28	120	680	45	635	645	530	845	1320
315L	2	508	508	216	65	140	18	58	315	28	120	680	45	635	645	530	845	1210
315L	4、6、8	508	508	216	80	170	22	71	315	28	120	680	45	635	645	530	845	1320
355M	2	610	560	254	75	140	20	67.5	355	28	125	800	49	730	710	655	1010	1500
355M	4、6、8	610	560	254	95	170	25	86	355	28	125	800	49	730	710	655	1010	1530
355L	2	610	630	254	75	140	20	67.5	355	28	125	800	49	730	710	655	1010	1500
355L	4、6、8	610	630	254	95	170	25	86	355	28	125	800	49	730	710	655	1010	1530
3551	2	630	800	224	80	170	22	71	355	35	125	800	49	760	770	760	1130	1870
3551	4	630	800	224	110	210	28	100	355	35	125	800	49	760	770	760	1130	1920
3552/3553	6、8	630	800	224	110	210	28	100	355	35	125	800	49	760	770	760	1130	1920

IM B5 外形及安装尺寸 IM B5 Overall and Mounting dimensions

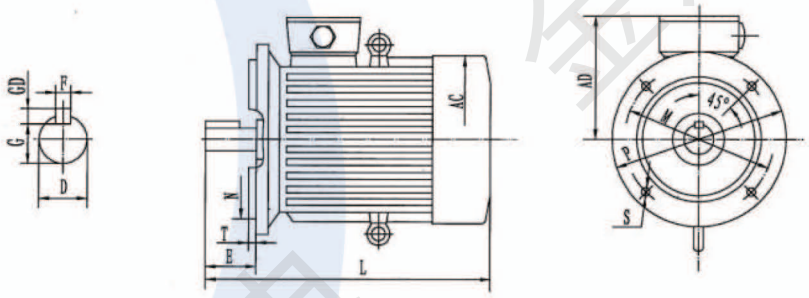

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension		
		D	E	F	G	M	N	P	S	T	AC	AD	L
80M	2、4	19	40	6	15.5	165	130	200	4-φ12	3.5	175	145	305
90S	2、4、6	24	50	8	20	165	130	200	4-φ12	3.5	205	170	360
90L	2、4、6	24	50	8	20	165	130	200	4-φ12	3.5	205	170	390
100L	2、4、6、8	28	60	8	24	215	180	250	4-φ14.5	4	215	180	435
112M	2、4、6、8	28	60	8	24	215	180	250	4-φ14.5	4	255	200	470
132S	2、4、6、8	38	80	10	33	265	230	300	4-φ14.5	4	310	230	510
132M	4、6、8	38	80	10	33	265	230	300	4-φ14.5	4	310	230	550
160M	2、4、6、8	42	110	12	37	300	250	350	4-φ18.5	5	340	260	730
160L	2、4、6、8	42	110	12	37	300	250	350	4-φ18.5	5	340	260	760
180M	2、4	48	110	14	42.5	300	250	350	4-φ18.5	5	390	285	770
180L	4、6、8	48	110	14	42.5	300	250	350	4-φ18.5	5	390	285	800
200L	2、4、6、8	55	110	16	49	350	300	400	4-φ18.5	5	445	320	860

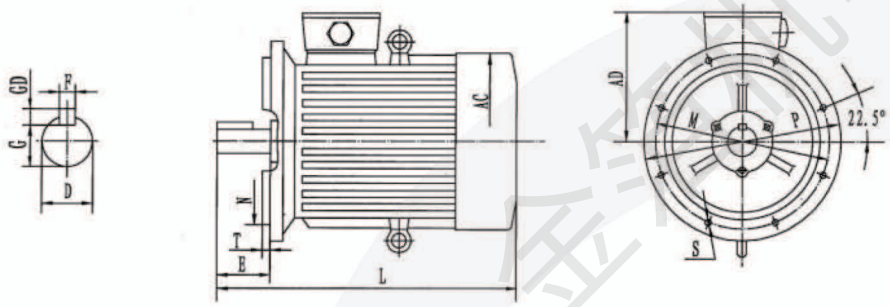

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension		
		D	E	F	G	M	N	P	S	T	AC	AD	L
225S	4、8	60	140	18	53	400	350	450	8-φ18.5	5	495	350	830
225M	2	55	110	16	49	400	350	450	8-φ18.5	5	495	350	830
225M	4、6、8	60	140	18	53	400	350	450	8-φ18.5	5	495	350	860
250M	2	60	140	18	53	500	450	550	8-φ18.5	5	550	390	990
250M	4、6、8	65	140	18	58	500	450	550	8-φ18.5	5	550	390	990
280S	2	65	140	18	58	500	450	550	8-φ18.5	5	630	435	990
280S	4、6、8	75	140	20	67.5	500	450	550	8-φ18.5	5	630	435	990
280M	2	65	140	18	58	500	450	550	8-φ18.5	5	630	435	1040
280M	4、6、8	75	140	20	67.5	500	450	550	8-φ18.5	5	630	435	1040

IM V1 外形及安装尺寸 IM V1 Overall and Mounting dimensions

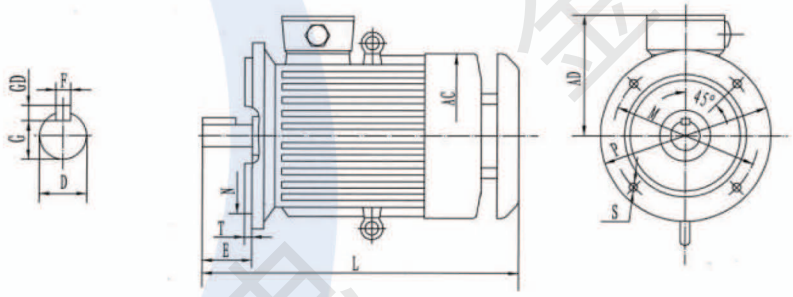

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension		
		D	E	F	G	M	N	P	S	T	AC	AD	L
180M	2、4	48	110	14	42.5	300	250	350	4-φ18.5	5	390	285	845
180L	4、6、8	48	110	14	42.5	300	250	350	4-φ18.5	5	390	285	875
200L	2、4、6、8	55	110	16	49	350	300	400	4-φ18.5	5	445	320	935

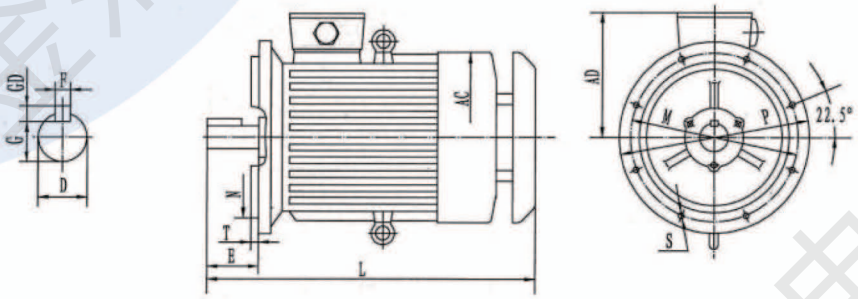

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension									外形尺寸 Overall Dimension		
		D	E	F	G	M	N	P	S	T	AC	AD	L
225S	4、8	60	140	18	53	400	350	450	8-φ18.5	5	495	350	910
225M	2	55	110	16	49	400	350	450	8-φ18.5	5	495	350	905
225M	4、6、8	60	140	18	53	400	350	450	8-φ18.5	5	495	350	935
250M	2	60	140	18	53	500	450	550	8-φ18.5	5	550	390	1025
250M	4、6、8	65	140	18	58	500	450	550	8-φ18.5	5	550	390	1025
280S	2	65	140	18	58	500	450	550	8-φ18.5	5	630	435	1085
280S	4、6、8	75	140	20	67.5	500	450	550	8-φ18.5	5	630	435	1085
280M	2	65	140	18	58	500	450	550	8-φ18.5	5	630	435	1135
280M	4、6、8	75	140	20	67.5	500	450	550	8-φ18.5	5	630	435	1135
315S	2	65	140	18	58	600	550	660	8-φ24	6	645	530	1325
315S	4、6、8	80	170	22	71	600	550	660	8-φ24	6	645	530	1390
315M	2	65	140	18	58	600	550	660	8-φ24	6	645	530	1435
315M	4、6、8	80	170	22	71	600	550	660	8-φ24	6	645	530	1500
315L	2	65	140	18	58	600	550	660	8-φ24	6	645	530	1435
315L	4、6、8	80	170	22	71	600	550	660	8-φ24	6	645	530	1500
355M	2	75	140	20	67.5	740	680	800	8-φ24	6	710	655	1650
355M	4、6、8	95	170	25	86	740	680	800	8-φ24	6	710	655	1700
355L	2	75	140	20	67.5	740	680	800	8-φ24	6	710	655	1650
355L	4、6、8	95	170	25	86	740	680	800	8-φ24	6	710	655	1700
3551	2	80	170	22	71	840	780	900	8-φ24	6	770	760	2020
3551	4	110	210	28	100	840	780	900	8-φ24	6	770	760	2070
3552、3553	6、8	110	210	28	100	840	780	900	8-φ24	6	770	760	2070

IM B35 外形及安装尺寸 IM B35 Overall and Mounting dimensions

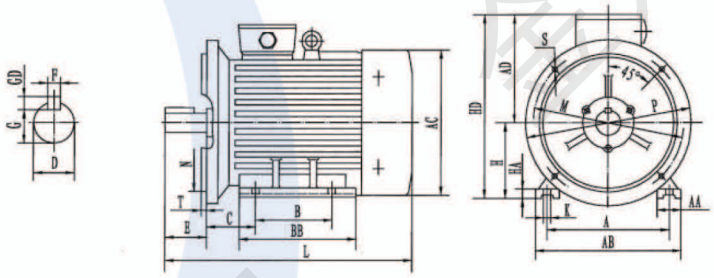

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension														外形尺寸 Overall Dimension							
		A	B	C	D	E	F	G	H	K	M	N	P	S	T	AA	BB	HA	AB	AC	AD	HD	L
80M	2, 4	125	100	50	19	40	6	15.5	80	10	165	130	200	4-φ12	3.5	34	130	10	165	175	145	220	305
90S	2, 4, 6	140	100	56	24	50	8	20	90	10	165	130	200	4-φ12	3.5	36	140	12	180	205	170	265	360
90L	2, 4, 6	140	125	56	24	50	8	20	90	10	165	130	200	4-φ12	3.5	36	165	12	180	205	170	265	390
100L	2, 4, 6, 8	160	140	63	28	60	8	24	100	12	215	180	250	4-φ14.5	4	40	176	14	205	215	180	270	435
112M	2, 4, 6, 8	190	140	70	28	60	8	24	112	12	215	180	250	4-φ14.5	4	45	180	15	230	255	200	310	470
132S	2, 4, 6, 8	216	140	89	38	80	10	33	132	12	265	230	300	4-φ14.5	4	55	186	18	270	310	230	365	510
132M	4, 6, 8	216	178	89	38	80	10	33	132	12	265	230	300	4-φ14.5	4	55	224	18	270	310	230	365	550
160M	2, 4, 6, 8	254	210	108	42	110	12	37	160	14.5	300	250	350	4-φ18.5	5	65	258	19	320	340	260	425	730
160L	2, 4, 6, 8	254	254	108	42	110	12	37	160	14.5	300	250	350	4-φ18.5	5	65	302	19	320	340	260	425	760
180M	2, 4	279	241	121	48	110	14	42.5	180	14.5	300	250	350	4-φ18.5	5	70	311	22	355	390	285	460	770
180L	4, 6, 8	279	279	121	48	110	14	42.5	180	14.5	300	250	350	4-φ18.5	5	70	349	22	355	390	285	460	800
200L	2, 4, 6, 8	318	305	133	55	110	16	49	200	18.5	350	300	400	4-φ18.5	5	70	363	25	395	445	320	520	860

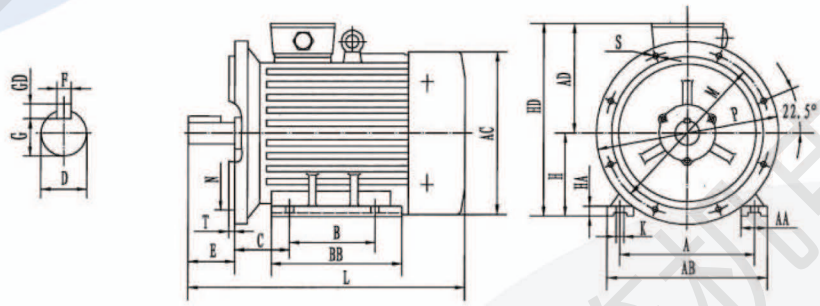

机座号 Frame	极数 Poles	安装尺寸 Mounting Dimension														外形尺寸 Overall Dimension							
		A	B	C	D	E	F	G	H	K	M	N	P	S	T	AA	BB	HA	AB	AC	AD	HD	L
225S	4, 8	356	286	149	60	140	18	53	225	18.5	400	350	450	8-φ18.5	5	75	349	28	435	495	350	575	830
225M	2	356	311	149	55	110	16	49	225	18.5	400	350	450	8-φ18.5	5	75	375	28	435	495	350	575	830
225M	4, 6, 8	356	311	149	60	140	18	53	225	18.5	400	350	450	8-φ18.5	5	75	375	28	435	495	350	575	860
250M	2	406	349	168	60	140	18	53	250	24	500	450	550	8-φ18.5	5	80	440	30	490	550	390	635	990
250M	4, 6, 8	406	349	168	65	140	18	58	250	24	500	450	550	8-φ18.5	5	80	440	30	490	550	390	635	990
280S	2	457	368	190	65	140	18	58	280	24	500	450	550	8-φ18.5	5	85	480	35	550	630	435	705	990
280S	4, 6, 8	457	368	190	75	140	20	67.5	280	24	500	450	550	8-φ18.5	5	85	480	35	550	630	435	705	990
280M	2	457	419	190	65	140	18	58	280	24	500	450	550	8-φ18.5	5	85	536	35	550	630	435	705	1040
280M	4, 6, 8	457	419	190	75	140	20	67.5	280	24	500	450	550	8-φ18.5	5	85	536	35	550	630	435	705	1040
315S	2	508	406	216	65	140	18	58	315	28	600	550	660	8-φ24	6	120	570	45	635	645	530	845	1180
315S	4, 6, 8	508	406	216	80	170	22	71	315	28	600	550	660	8-φ24	6	120	570	45	635	645	530	845	1290
315M	2	508	457	216	65	140	18	58	315	28	600	550	660	8-φ24	6	120	680	45	635	645	530	845	1210
315M	4, 6, 8	508	457	216	80	170	22	71	315	28	600	550	660	8-φ24	6	120	680	45	635	645	530	845	1320
315L	2	508	508	216	65	140	18	58	315	28	600	550	660	8-φ24	6	120	680	45	635	645	530	845	1210
315L	4, 6, 8	508	508	216	80	170	22	71	315	28	600	550	660	8-φ24	6	120	680	45	635	645	530	845	1320
355M	2	610	560	254	75	140	20	67.5	355	28	740	680	800	8-φ24	6	125	800	49	730	710	655	1010	1500
355M	4, 6, 8	610	560	254	95	170	25	86	355	28	740	680	800	8-φ24	6	125	800	49	730	710	655	1010	1530
355L	2	610	630	254	75	140	20	67.5	355	28	740	680	800	8-φ24	6	125	800	49	730	710	655	1010	1500
355L	4, 6, 8	610	630	254	95	170	25	86	355	28	740	680	800	8-φ24	6	125	800	49	730	710	655	1010	1530
3551	2	630	800	224	80	170	22	71	355	35	840	780	900	8-φ24	6	125	800	49	760	770	760	1130	1870
3551	4	630	800	224	110	210	28	100	355	35	840	780	900	8-φ24	6	125	800	49	760	770	760	1130	1920
3552/3553	6、8	630	800	224	110	210	28	100	355	35	840	780	900	8-φ24	6	125	800	49	760	770	760	1130	1920